


ASSEMBLY AND INSTALLATION INSTRUCTIONS

H0260

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.

Hardware Package (included):

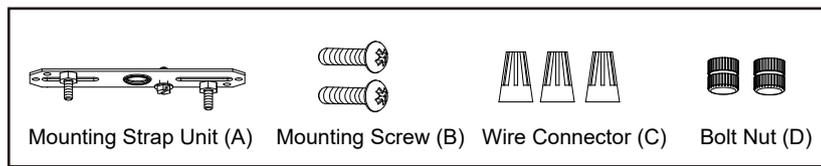


Installation Steps

Turn off the power at fuse or circuit box


1. Adjust the outer arms to the right angles.
2. Secure rods into the couplings of the light.
3. Attach the mounting strap unit (A) to the outlet box using two mounting screws (B).
4. Rod Connections:
 - a. Thread the fixture wires from the fixture through the lower rod, and then secure the lower rod onto fixture using the threaded pipe.
 - b. Thread the fixture wires through the middle rod, and then secure the middle rod onto the lower rod using the threaded pipe.
 - c. Thread the fixture wires through the upper rod, and then secure the upper rod onto the middle rod using the threaded pipe.
 - d. Thread the fixture wires through the fixture canopy, and then secure fixture canopy onto the upper rod using the threaded pipe.

**Note: Height adjustable from 31-3/4" to 73-3/4".
Use fewer rods if shorter length is desired.**

5. Pull out the source wires from the outlet box. Make wire connections using wire connectors (C) as follows:
 - Connect the smooth-coated wire (marked) from the fixture to the black wire from the power source.
 - Connect the ribbed-coated wire (unmarked) from the fixture to the white wire from the power source.
 - Attach the fixture ground wire to the mounting strap unit (A) with the green ground screw, then connect it to the house ground wire with a wire connector (C).Carefully put the wires back into the outlet box.

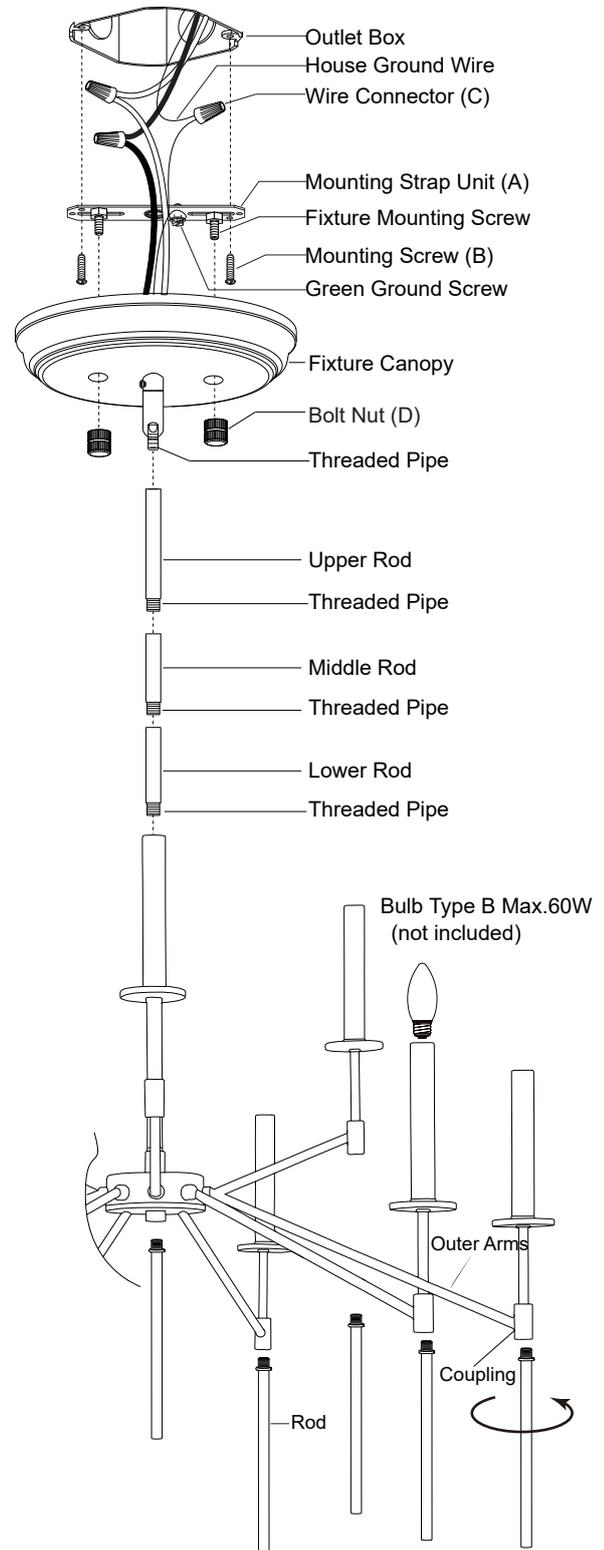

6. Attach the fixture canopy to the mounting strap unit (A) by inserting the fixture mounting screws, then secure it with two bolt nuts (D).
7. Install 9pcs candelabra base bulbs (not included).
Check relamping label at socket area or packaging for maximum wattage allowed.
8. Angled mounting recommended for a vaulted or angled ceiling.
(See Fig. 1)

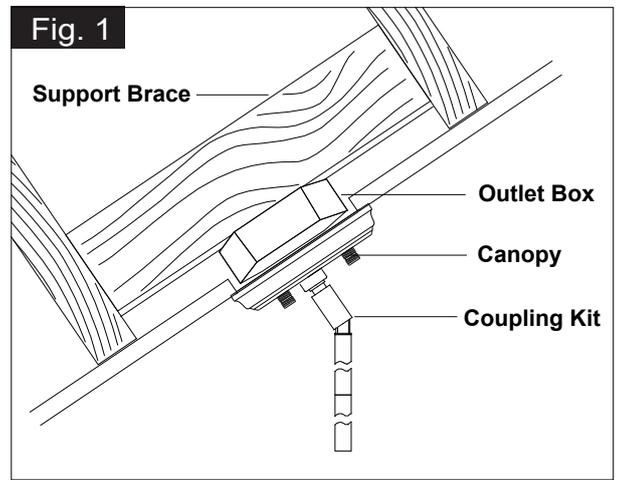


Turn on the power at fuse or circuit box

The following parts are available for re-order if damaged or missing.

Spare Parts List:

				← Assembly Kit 6295MM (1SET)
Mounting Strap Unit (A)	Mounting Screw (B)	Wire Connector (C)	Bolt Nut (D)	

12" Rod 3259RD	6" Rod 3260RD	3" Rod 3261RD

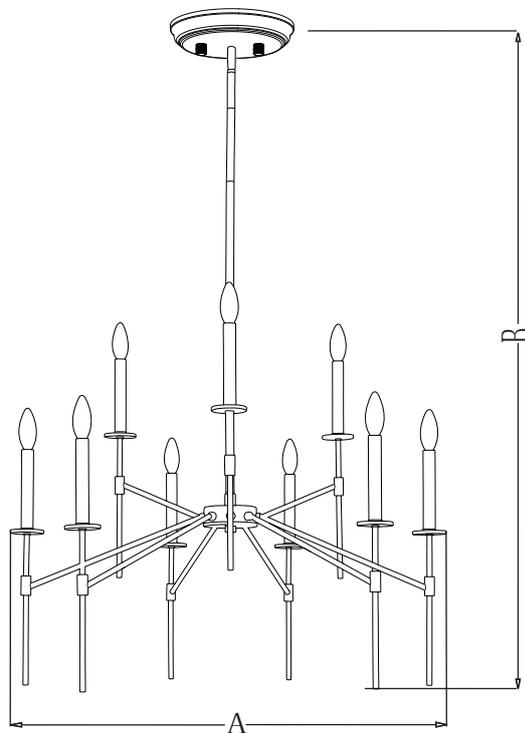

A: 32"

B: 31-3/4"~73-3/4"